


TINKER & RASOR

Portable Reference Electrodes Copper-Copper/Sulfate

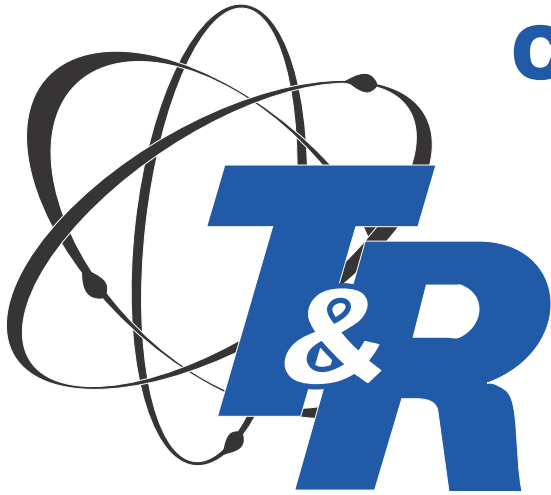

Models:

2-A Pencil cell

3-A for concrete

6-A, 8-A Flat Tips

6-B, 8-B Pointed Tips


Features:

- Long lasting tips
- Strong body for outdoor use
- High purity copper
- High purity copper-sulfate
- Optional Clear View tube
- Temperature sensor



AVAILABLE FROM STOCK!

Distributed by

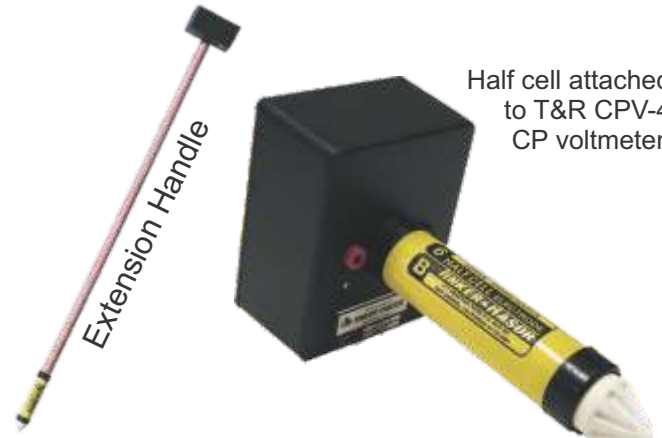

Half cell attached
to T&R CPV-4
CP voltmeter.

www.teststations.com

www.tinker-rasor.com

www.detectron.com

Info@tinker-rasor.com



Tinker & Rasor quality is found in our products,
our people and our customer service.





TINKER & RASOR

CORROSION MITIGATION INSTRUMENTATION

PRODUCT DATA SHEET

MODELS 2-A, 3-A, 6-A, 6-B, 8-A and 8-B

Features:

- Flat or Pointed Tips
- Tip grooves provide greater surface area
- Tips pre-saturated with copper-sulfate
- Knurled nut on 1/4" - 20 (except 2-A) threaded rod for easy lead connection (fork, ring, etc)
- Model 2-A, #6 knurled nut on 10-32 threaded copper rod.
- Charged with copper-sulfate
- Multiple Diameters and Lengths available

Construction:

- New, tougher body
- Optional Clear View Tube
- Stronger, longer lasting tips
- O-ring seals

Applications:

- Pipe to Soil potentials
- Close Interval Surveys
- Structure to Cell
- Lab use

Recommendations:

Use with most CP Voltmeters
Half cell models 3, 6 & 8 screw into back of
T&R CPV-2 and CPV-4 CP Voltmeters

Specifications:

High purity copper rod
High purity copper-sulfate crystals

Dimensions:


- 2-A: 3/8" x 5-3/4"
- 3-A: 3" x 5"
- 6-A: 1-1/4" x 6"
- 6-B: 1-1/4" x 7"
- 8-A: 1-1/4" x 8"
- 8-B: 1-1/4" x 9"

DELIVERY: **Immediately from STOCK**
F.O.B. San Bernardino, CA USA

SERVICE: **24-hour Turn-Around**

TERMS: Net30 Days, on approval of credit

WARRANTY: **90 Days**, parts and labor

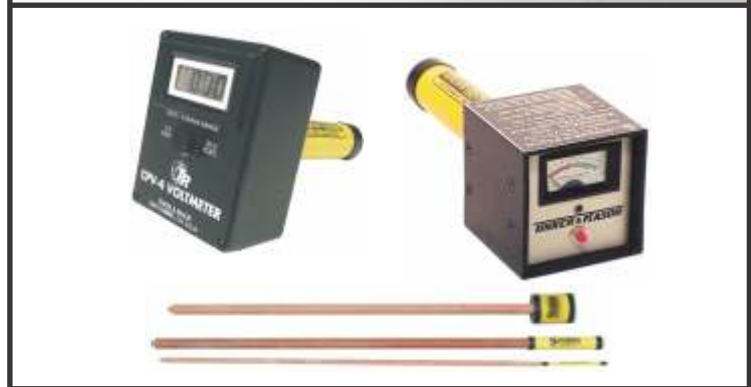

Half Cells, CP Voltmeters and Extension Handles

AVAILABLE FROM STOCK